

# G202 Industrial Edge Computing Gateway








## Quick Installation Guide

Version: 1.1

© Vantron Technology, Inc. All rights reserved.

## 1. COMPONENT CHECKLIST


Check if all components are available:

- Gateway 
- 4G LTE antenna / Wi-Fi & BT antenna 
- Power adapter 
- Power cable 
- DIN rail mount bracket / wall mount bracket 

**Note:** Actual accessories might vary slightly from the list above as the customer order might differ from the standard configuration options.

## 2. INSTALL THE GATEWAY (DIN rail mount for illustration)

- Hold the gateway vertically;
- Place the gateway on a fixed DIN rail and fit the clamp of the bracket (the spring inside) into one side of the DIN rail;
- Push the gateway in such a way as to compress the spring till there is enough space for the latch of the bracket (non-spring side) to fit the other side of the DIN rail properly.

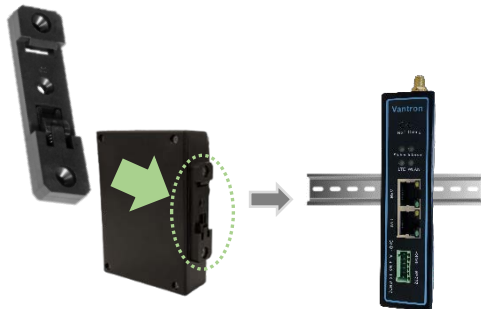

**Note:** The DIN rail mount bracket is pre-installed on the gateway before shipment.

## 3. INSTALL THE ANTENNAS

- Install the round head antennas to the WLAN antenna connectors;



- Install the flat head antennas to the LTE antenna connectors;



- Tighten the rotating heads to secure the antennas in proper position.

## 4. INSTALL THE SIM CARD

- Insert an activated SIM card into SIM1 slot with the gold-colored contacts facing down, or, insert into SIM2 slot with the gold-colored contacts facing up;



- Push the SIM card to secure it.

**Note:** Installing the Micro SD card is literally the same as installing the SIM card, and users need only to install the Micro SD card into corresponding slot with the gold-colored pins facing up.

## 5. ETHERNET CONNECTION




There are two Ethernet ports on the gateway.

- Connect the WAN port of the gateway to a live Ethernet port before connecting any client device, or skip this if you use cellular data for network connection;
- Plug one end of the Ethernet cable into the LAN port on the gateway;
- Plug the other end of the Ethernet cable into the open port on a client device.

## 6. POWER SUPPLY

- Connect the terminal connector of the power cable to the terminal block of the gateway, and the other end to the power adapter;
- Plug the adapter into a 9~36V DC power outlet;
- The power indicator will turn solid green upon power application.

## 7. WARNING

-  Do not install the product on top of any other electrical equipment or place any other equipment on top the product.
-  Keep the product away from any heat sources such as direct sunlight, heaters, radiators, or other A/V receivers or devices that emit heat.
-  Failure or improper selection or improper use of the product described herein or other related items may cause death, personal injury or property damage.



### **Vantron Technology, Inc.**

Address: 48434 Milmont Drive, Fremont, CA 94538

Tel: (650) 422-3128

Email: [sales@vantrontechnology.com](mailto:sales@vantrontechnology.com)