IBOX3588 Edge Al

Embedded Industrial Computer



Product Brief

Vantron IBOX3588 Edge AI Embedded Industrial Computer is powered by Rockchip's latest flagship RK3588 AIoT chipset. The innovative chipset is equipped with an 8-core 64-bit CPU, an ARM Mali-G610 MP4 quad-core GPU, and a built-in AI acceleration NPU, providing 6 TOPS computing power. Furthermore, it supports mainstream deep learning frameworks to allow a wide range of AI-based applications. As technology continues to advance, there definitely will be a rising demand for AI-based products in the industrial control market, making IBOX3588 the ideal choice for businesses looking to stay ahead of the curve.

The industrial computer boasts an impressive array of features including two Gigabit Ethernet ports, support for Wi-Fi 6 and Bluetooth 5.1, ensuring the communication is uninterrupted. IBOX3588 also supports 8K video decoding and encoding for exceptional display performance.

IBOX3588 offers rich peripheral interfaces, allowing businesses to connect a wide range of peripherals for extended applications, making customers rest assured of a reliable and consistent user experience.

Exterior and Features





	IBOX3588					
	RK3588 Quad-core CA76 + Quad-core CA55 processor					
	High-quality video output					
-0- -0-	Rich interface for expansion					
@	Wi-Fi (6)/BT/ETH for communication					
	Industrial-grade wide temperature design					
	High computing power					
	Deep learning acceleration					
7 L	Industrial longevity					


Vantron | Public www.vantrontech.com

IBOX3588 Edge AI Embedded Industrial Computer Datasheet

IBOX3588						
System	CPU	Rockchip RK3588, Quad-core Cortex-A76 + Quad-core Cortex-A55, 2.4GHz (Max.)				
	GPU	ARM Mali-G610 MC4, 1GHz (Max.)				
	NPU	6 TOPS				
	Memory	8GB LPDDR4, up to 32GB				
	Classes	64GB eMMC, up to 128GB				
	Storage	SSD supported by an M.2 M-Key/M.2 B-Key (256GB ~ 1TB)				
Communication	Ethernet	2 x RJ45, 10/100/1000Mbps				
	Cellular	4G/5G (Optional)				
	Wi-Fi & Bluetooth	Wi-Fi 802.11 a/b/g/n/ac/ax + BT 5.1				
Media	Display	1 x HDMI (4096 x 2160 @60Hz)				
	Audio	1 x Combo audio jack				
		2 x USB 3.0 Host, Type-A				
	USB	1 x USB 2.0 Host, Type-A				
		1 x USB 3.0 Type-C (OTG supported)				
I/Os	Serial port	2 x RS232/RS485 (2 x 3 x 3.81mm, Baud rate: 115200)				
1,03	SIM slot	1 x Micro SIM slot				
	SD slot	1 x Micro SD slot				
	RTC	Supported				
	Watchdog	Supported				
	M.2 slot	1 x M.2 M-Key (2260/2280), PCIe 3.0 x 4, for SSD				
Expansion		1 x M.2 B-Key (2242/3052), USB 3.0/SATA 3.0, for 4G/5G/SSD				
Expansion	GPIO	4 x GPIO on the Phoenix terminal				
	CAN	2 x CAN on the Phoenix terminal				
System Control	Button	1 x ON/OFF button (long press to reset)				
System control	LED	1 x LED indicator for power and system status				
	OS	Android 12, Debian 11, Ubuntu 20.04				
	Language	English (default), Chinese				
Software	Device management	BlueSphere MDM (Android version only)				
	platform	Bidespitere WBW (Android Version only)				
	OTA tool	BlueSphere OTA				
Power	Input	1 x Power distribution block (12V/5A, 24V/3A)				
	Dimensions	200mm x 141mm x 63.2mm				
Mechanical	Enclosure	Aluminum + sheet metal, black				
	Weight	1200g				
	Shock test	IEC 60068-2-27				
	IP rating	IP40				
Environment Condition	Temperature	Operating: 0° C ~ +60°C (Optional: -20°C ~ +70°C) Storage: -40°C ~ +85°C				
	Humidity	0~95% RH (non-condensing)				
	Certification	FCC*, CCC, UL				

st IBOX3588 is FCC certified without cellular capability.

Product Outlines

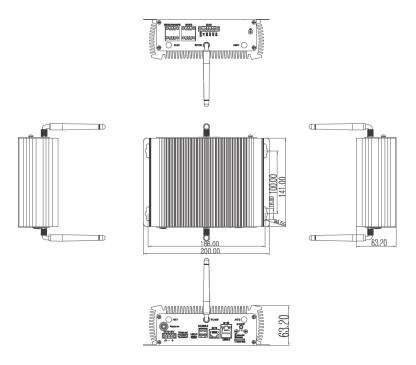

Ordering Information

Ordering No.	Memory	Storage	Description
IBOX3588	8GB	64GB	USB 2.0, USB 3.0, Ethernet, Wi-Fi, Bluetooth
IBOX3588-SSD1	8GB	64GB + 256GB (SSD)	USB 2.0, USB 3.0, Ethernet, Wi-Fi, Bluetooth, 256GB SSD
IBOX3588-4G	8GB	64GB	USB 2.0, USB 3.0, Ethernet, Wi-Fi, Bluetooth, 4G

^{*} More variants are available, please contact the sales executive for details.

Packing list							
IBOX3588 Embedded industrial computer	1	Mating connector for GPIO	1				
Wi-Fi & Bluetooth antenna	2	Mating connector for CAN	2				
DC power connector	1	256GB/512GB/1T SSD for SSD version	1				
Mating connector for RS232/RS485	2	4G antenna/5G antenna for cellular version	2/4				
Optional accessories							
12V DC Power adapter	1	Power cord	1				

Since its establishment in 2002 by two Silicon Valley entrepreneurs, Vantron Technology has been at the forefront of the connected IoT devices and IoT platform solutions. Today, Vantron boasts a global customer base that includes Fortune Global 500 companies. Its product lines cover edge intelligent hardware, IoT communication devices, industrial displays, and BlueSphere cloud platforms.

With over 20 years of experience in R&D of intelligent edge hardware, Vantron has provided users with diverse embedded solutions featuring ARM and X86 architectures. Its offerings range from Linux to Windows, from embedded level to desktop level, and from gateways to servers. In addition, it provides users with system clipping, driver transplantation and other related services.

IBOX3588 V2.2 © 2025 Vantron Technology, Inc. All rights reserved. This document may be updated or modified by Vantron Technology without prior notice.