

IBOXJT2 Edge AI

Embedded Industrial Computer




Product Brief





IBOXJT2 is an intermediate option of Vantron edge AI embedded industrial computer family. It is powered by the NVIDIA® Jetson™ TX2 NX core module that features NVIDIA Pascal™ GPU with 256 CUDA® cores, capable of delivering up to 1.33 TFLOPS compute performance—approximately 2.5 times the performance of Vantron IBOXNANO, an entry-level option powered by NVIDIA® Jetson™ Nano core module. It also supports popular AI frameworks such as TensorFlow, Keras, PyTorch, Caffe, and MXNet for flexible deployment of AI applications.

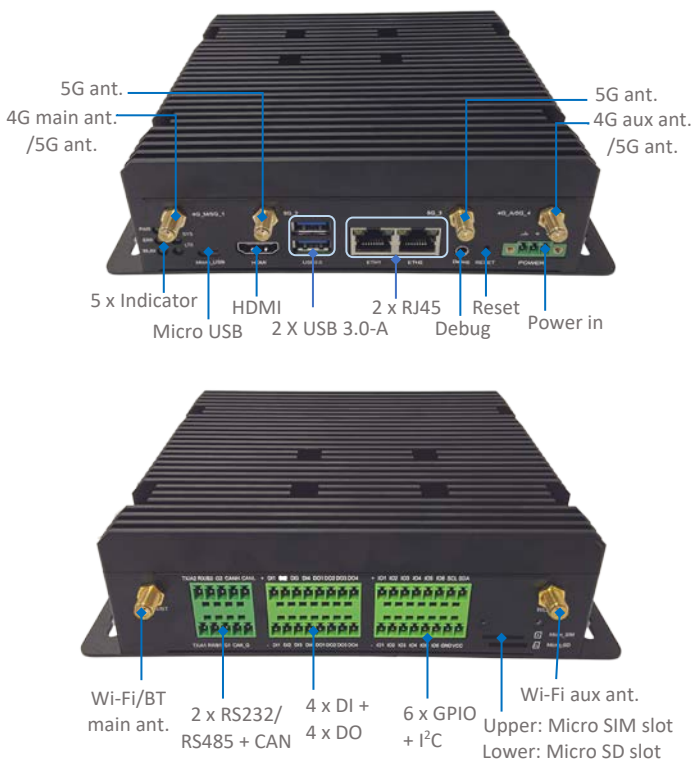IBOXJT2 provides dual gigabit Ethernet jacks, Wi-Fi 6, Bluetooth 5.0, along with 4G and optional 5G cellular connectivity to ensure stable and reliable interfacing with sensors, cameras, and other edge devices. Its edge computing feature enables data to be processed and analyzed at the network edge where data is generated before being transmitted to the data center. This significantly relieves the network congestion and reduces data latency. IBOXJT2 features rich interfaces, such as USB, RS232/RS485, CAN, GPIO, DI, DO for flexible user expansions. Its built-in ARM Trustzone technology, TPM module, SHA/AES algorithms ensure data protection and secure operation in edge deployments. Typical application of IBOXJT2 includes smart home, smart city, remote diagnosis, autonomous driving, etc.

Features and Highlights




IBOXJT2

-  NVIDIA Jetson TX2 core module
-  Multi-standard video decoder & encoder
-  Support for 4K UHD (3840 x 2160) HDMI video output
-  Gigabit Ethernet, Wi-Fi 6, BT 5.0, 4G/5G connectivity
-  Rich interfaces for flexible expansion
-  Support for popular AI frameworks
-  Support for edge computing
-  Compact size for flexible deployment

IBOXJT2 Edge AI Embedded industrial computer Datasheet

IBOXJT2			
System	CPU	NVIDIA Jetson TX2 NX, Dual-core NVIDIA Denver 2 64-bit processor (2GHz) + Quad-core Arm Cortex-A57 MPCore processor (2GHz)	
	AI performance	1.33 TFLOPS	
	GPU	NVIDIA Pascal GPU with 256 CUDA cores	
	Memory	4GB 128-bit LPDDR4 (Optional: 8GB)	
	Storage	16GB eMMC 5.1 (Optional: 64GB, 128GB) 1 x Micro SD slot	
Communication	Ethernet	2 x RJ45, 1000Mbps	
	Wi-Fi & Bluetooth	Wi-Fi 6 & BT 5.0	
	Cellular	4G LTE (Optional: 5G)	
I/Os	Serial port	2 x RS232/RS485, isolated (2 x 3 x 3.81mm, baud rate: 115200)	
	USB	2 x USB 3.0 Type-A 1 x Micro USB (USB 2.0 OTG supported)	
	Video output	1 x HDMI 2.0, 3840 x 2160 @60Hz	
	DI/DO	4 x DI 4 x DO	
	Expansion		1 x CAN
			1 x I ² C
			6 x GPIO
	Debug	1 x 3.5mm Audio jack	
	SIM slot	1 x Micro SIM slot	
	Antenna	1 x Wi-Fi + 1 x Wi-Fi & BT SMA connectors 4 x 5G SMA connector / 2 x 4G SMA connector	
	RTC	Supported	
	WDT	Supported	
	System Control	LED indicator	1 x Power indicator 1 x System indicator 1 x Error indicator 1 x Cellular connectivity indicator 1 x Wi-Fi connectivity indicator
Button		1 x Reset button	
Power	Input	12V~36V DC 1 x Power terminal (1 x 3 x 3.81mm)	
Software	Operating system	Ubuntu 18.04	
	Video encode	1x 4K @60 (HEVC) 4x 1080p @60 (HEVC) 8x 1080p @30 (HEVC)	
	Video decode	2x 4K @60 (HEVC) 4x 4K @30 (HEVC) 7x 1080p @60 (HEVC) 14x 1080p @30 (HEVC)	
	AI framework	TensorFlow, Keras, PyTorch, Caffe, MXNet	
	Security	ARM Trustzone, TPM, SHA, AES	
Mechanical	Dimensions	190mm × 140mm × 50.7mm (with mounting brackets)	
	Installation	Wall mount (Optional: DIN rail mount)	
	IP rating	IP40	
	Cooling mode	Fanless	
Environment Condition	Temperature	Operating: -20°C ~ 60°C Storage: -40°C ~ 85°C	
	Humidity	Operating: 5%~95% RH (Non-condensing)	
	EMC	EMC level 3	
	Certification	FCC, CE, ISED, PTCRB	

Product Outline

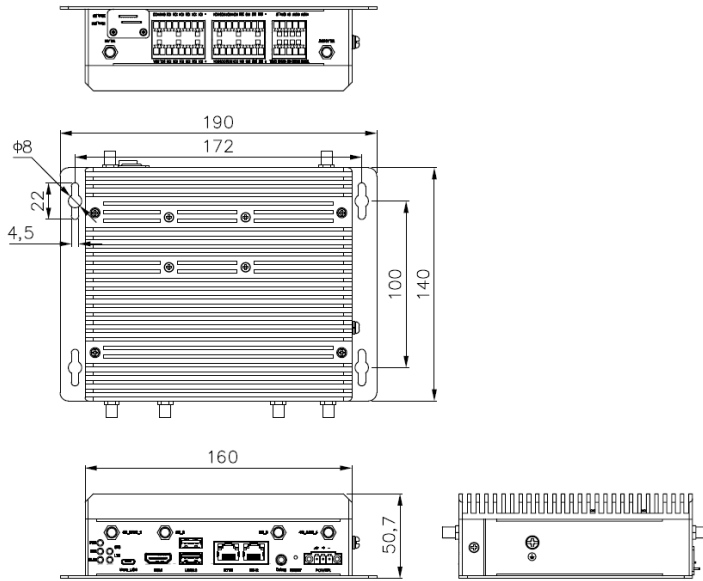

Ordering Information

Ordering No.	Memory & Storage	Ethernet	Wi-Fi & BT	Cellular
IBOXJT2-L4	4GB + 16GB	1000Mbps	Wi-Fi 6 & BT 5.0	4G
IBOXJT2-L5	4GB + 16GB	1000Mbps	Wi-Fi 6 & BT 5.0	5G
IBOXJT2-M4	8GB + 64GB	1000Mbps	Wi-Fi 6 & BT 5.0	4G

* More variants are available, please contact the sales executive for details.

Packing list	
IBOXJT2 embedded industrial computer	1
Wi-Fi & BT antenna (robber)	2
4G LTE antenna (magnetic sucker)	2
Qualified certificate	1

Optional accessories	
12V DC power adapter	1
AC power cord (US)	1
DC power connector	1
5G antenna (magnetic sucker)	4

Since its establishment in 2002 by two Silicon Valley entrepreneurs, Vantron Technology has been at the forefront of the connected IoT devices and IoT platform solutions. Today, Vantron boasts a global customer base that includes several Fortune 500 companies. Its product lines cover edge intelligent hardware, IoT communication devices, industrial displays and BlueSphere cloud device management platform.

With over 20 years of experience in R&D of embedded edge intelligent hardware, Vantron has provided users with diverse embedded solutions featuring ARM and X86 architectures. Its offerings range from Linux to Windows, from embedded to desktop level, and from gateway to server. In addition, it provides users with system clipping, driver transplantation and other related services.